



Australian Government

13070.21
10/802,438

Patent Office
Canberra

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Complete specification in connection with Application No. 2003201290 for a patent by MR STEPHEN GOWLAND as filed on 17 March 2003.

I further certify that the above application is now proceeding in the name of GOWLAND PTY LTD pursuant to the provisions of Section 104 of the Patents Act 1990.



WITNESS my hand this
Twenty-first day of April 2004

JULIE BILLINGSLEY
TEAM LEADER EXAMINATION
SUPPORT AND SALES

CERTIFIED COPY OF
PRIORITY DOCUMENT

BEST AVAILABLE COPY

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION FOR A

STANDARD PATENT

Name of Applicant: Stephen James GOWLAND

Address of Applicant: 2 Wilna Place
Helena Valley, Western Australia, 6056, Australia

Actual Inventor: Stephen James GOWLAND

Address for Service: Griffith Hack, Patent and Trade Mark Attorneys, 6th Floor,
256 Adelaide Terrace, Perth, Western Australia, 6000.

Standard Complete Specification for the invention entitled:

PIT COVER

The following is a full description of this invention, including the best method of performing it known to me:-

Pit Cover

Field of the Invention

[0001] The present invention relates to a pit cover particularly, though not exclusively, for covering pits which provide access to underground utilities such as communication lines.

Background of the Invention

[0002] Pits are provided in the ground to allow access to subterranean utilities such as communication lines, electricity cables, water and gas pipes enabling regular inspection, maintenance and repair. Covers are provided for the pits to ensure continuity of the ground so that people, animals and vehicles do not fall into the pits, and also to control access to the utilities. A typical pit cover includes casing in the form of a rectangular box with an open top and bottom which is cemented into the ground to define an access opening to the pit, and a cover plate which is releasably locked to the case portion. A bar extends across the casing which is used for fastening the plate to the casing. To this end, a cover plate is also provided with an enclosure through which the bar extends. The enclosure can be accessed by removing a disc-shaped door which is typically held by screws on the cover plate. A padlock is used to engage the bar and is disposed within the enclosure thereby preventing the plate from being removed from the casing. One of the drawbacks of this type of pit cover is that the door can easily be removed by vandals simply unscrewing two screws leaving the lock exposed and open to cutting by bolt cutters. Whether the door is removed by vandals or the screws simply work loose by action of traffic, once the door is removed the open enclosure presents a tripping hazard. Additionally, the cross bar can often be manually pulled away from the casing thereby detaching the cross bar with the cover plate to allow unauthorised access to the pit and associate utilities.

Summary of the Invention

[0003] According to the present invention there is provided a pit cover including:
a casing having a peripheral wall and open opposite first and second ends;

a cross bar coupled to and extending across said peripheral wall on an inside of said casing; and,

a cover plate configured to cover said first end of said casing, said cover plate having: a first surface which when said cover plate covers said first end is located on an outside of said casing, and a second opposite surface; an enclosure supported on said second surface and having an opening through which a part of said cross bar can extend into said enclosure; and, a door coupled to said cover plate said door moveable between a first position where said door closes said enclosure and a second position in which said door opens said enclosure to allow access to said enclosure from said first surface.

[0004] Preferably said pit cover includes biasing means associated with said door for biasing said door towards said first position.

[0005] Preferably said door is pivotally coupled to said cover plate.

[0006] Preferably said casing is provided with first and second catches for releasably catching said cross bar to couple said cross bar to said casing.

[0007] Preferably each of said catches includes a slot open at one end and closed at an opposite end in which said cross bar is received.

[0008] Preferably said catches are formed separately from and fixed to said casing.

[0009] Preferably said cross bar includes a first length extending in a first direction and one or more catch portions at each end of said first length, at least one catch portion at each end extending in a direction non-parallel to said first direction, said catch portions

being receivable in said catches.

[0010] Preferably said part of said cross bar is a tab which is located in a position to extend through said opening into said enclosure.

[0011] Preferably said tab includes a hole by which a locking device can lock onto said tab to prevent said cover plate from being removed from said casing.

Brief Description of the Figures

[0012] An embodiment of the present invention will now be described by way of example with reference to the accompanying figures in which:

Figure 1 is a cross-sectional view of an embodiment of a pit cover in accordance with the present invention;

Figure 2 is a copy of a photograph of a cover plate incorporated in the pit cover having an associated door in a closed position;

Figure 3 is a copy of a photograph of the cover plate depicted in Figure 2 with the door in an opened position;

Figure 4 is an enlarged front view of a portion of the cover plate with the door in an opened position;

Figure 5 is a copy of a photograph of a cross bar incorporated in the pit cover;

Figure 6 is a copy of a photograph of a case portion of the pit cover; and,

Figure 7 is a copy of a photograph of a catch incorporated in the pit cover.

Detailed Description of Preferred Embodiment

[0013] Referring to the accompanying drawings, an embodiment of a pit cover 10 in accordance with the present invention includes a casing 12, a cross bar 14 and a cover plate 16. The casing 12 has, a peripheral wall 18 which is in the general shape of a rectangle and, open opposite ends 20 and 22. The open end 20 may be considered as a top of the casing and the end 22 the bottom. As shown most clearly in Figure 1, the cross bar 14 is coupled to and extends across the wall 18 on an inside 24 of the casing 12. The cover plate 16 is configured to cover the first end or top 20 of the casing. The cover plate 16 has a first or upper surface 26 which, when the cover plate 16 covers the first end 20 of the casing 12 is located on an outside of the casing 12. An enclosure 28 is supported on a second opposite side 30 of the cover plate 16 and is provided with an opening in the form of a slot 32 through which a part, in the form of a tab 34, of the cross bar 14 can extend into the enclosure 28. A door 36 is coupled to the cover plate 16 to provide access to the enclosure 28. The door 36 is moveable between a first position, depicted in Figures 1 and 2, where it closes the enclosure 28, and a second position, depicted in Figures 3 and 4, where the door allows access to the enclosure 28.

[0014] In use, the casing 12 would typically be cemented about the opening of a pit to an underground utility. The cover plate 16 is placed over the top 22 of the casing 12 so that the tab 34 projects through the opening 32. The door 36 can be opened to allow a locking device such as a padlock to be engaged with the tab 34 thereby effectively coupling the cross bar 14 with the cover plate 16. As the cross bar is also coupled with the casing 12, this effectively locks the cover plate 16 to the casing 12.

[0015] A flat bar bracing 38 extends inboard of, and about, the perimeter of the cover plate on the inner side 30. The door 36 is of a generally rectangular shape and located generally centrally in the cover plate 16, with the major length of the door 36 extending in the same direction as the major length of the cover plate 16. Most conveniently the door 36 is formed by cutting it out of the cover plate 16 leaving a hole or opening 37 of complementary configuration within which the door 36 resides.

[0016] When the door 36 is in its first or closed position, it lies flush with the remainder of the cover plate 16. With reference to Figures 1 and 4, the door 36 is pivotally coupled to the cover plate 16 via a pivot pin 40. The pin 40 passes through two spaced apart tubular lugs 42 which are fixed to an underside 44 at one end of the door 36. Opposite free ends 46 of the pin 40 extend into respective tubular lugs 48 fixed to the surface 30 of the cover plate 16. A bias means in the form of a spring 50 is coiled about the pin 40 between the lugs 42 to bias the door 36 to the first or closed position depicted in Figures 1 and 2. The spring 50 has a length 52 at one end which abuts, or can abut, a surface of the enclosure 28 or the surface 30 of the plate 26. A second length 54 of the spring 50 at an opposite end passes through a hole 56 formed in a block 58 fixed to the underside 44 of the door 36.

[0017] The enclosure 28 is in the form of an open top box 60 having side walls 62 which depend from the inner surface 30 of the plate 16 about the periphery of the hole 37 in the plate 16 which accommodates the door 36. The box 60 includes a bottom wall 64 which lies parallel to the cover plate 16 and in which is formed the opening or slot 32 to receive the tab 34. It should be recognised that when the door 36 is open with the tab 34 projecting into the enclosure 28, no access is available to the inside 24 of the casing 12 or indeed to the pit in which the pit cover 10 is fitted. By passing the bolt of a padlock through a hole 66 formed in the tab 34, the cover plate 16 is effectively locked to the cross bar 14 which in turn is coupled to the casing 12 thereby preventing removal of the cover plate 16.

[0018] With particular reference to Figures 1 and 5, the cross bar 14 includes a first length 68 in the form of a strip or flat bar which extends in a first direction and one or more (in this particular instance only one) catch portion 70 of each end of the length 68. The catch portions 70 extend in a direction non-parallel with and moreover in this embodiment at right angles to, the direction of the first length 68. The catch portion 70 may be formed integrally with the first length 68 by appropriate bending of a flat or strip bar. Alternately, the catch portion 70 may be welded or otherwise fixed to the ends of the first length 68. The tab 34 may be made from the same material as the first length 68 and/or catch portion 70 and extends upwardly from the fixed length 68.

[0019] Opposite ends of the cross bar 14 are coupled to the casing 12 via respective catches 72. Each catch 72 includes a back plate 74 provided with four spaced apart holes 76 to allow fastening of the catches 72 to the walls 18 on the inside 24 of the casing 12. A box-like structure 78 is fixed to the backing plate 74 and is provided with an open end 80 and a slot 82 extending longitudinally from the open end 80. The cross bar 16 is coupled to the casing 12 by sliding the catch portions 70 into the box structures 78 from the open end 80. When the cover plate 16 is placed over the end 20 of the casing 12 with the tab 34 projecting into the enclosure 28, the cross bar 14 is prevented from sliding out of the box-like structure 78.

[0020] It would be appreciated that in the above described embodiment of the pit cover 10, the door 36 is always attached to the cover plate 16 via the pivot pin 40 and this cannot be easily detached. In addition, biasing the door 36 ensures that in the absence of a third party deliberately moving the door 36 to the open position, the door 36 will stay closed so that the cover plate 16 and door 36 provide a substantially planar continuous surface. Additionally provision of the catch portions 70 on the cross bar 14 reduce the likelihood of unauthorised users manually forcing the cover plate 16 from the casing 18 which is known to occur with prior pit covers where sufficient manual force is provided to deflect the cross bar sufficiently to detach its ends from the casing. Further by appropriate shaping and dimensioning of the opening 37 in which door 36 resides the insertion of bolt cutters for the purposes of cutting a padlock engaged with tab 34 can be prevented. To this end the opening 37 is ideally rectangular in shape with dimensions in the order of 200mm x 70mm.

[0021] Now that an embodiment of the pit cover 10 has been described in detail it will be apparent to those skilled in the relevant arts that numerous modifications and variations may be made without departing from the basic inventive concepts. For example, in the illustrated embodiment, the catch portions 70 are depicted as extending in a downward direction from the ends of the length 68 of cross bar 14. However, if desired they may be configured to extend upwardly in the same direction as the tab 34. In addition, the catch portion 70 may be formed of a different configuration for example they may extend on

opposite sides of the first lengths 68 to also provide the cross bar 14 with a generally eye-shaped profile. In addition, the casing 12 and cover plate 16 may be relatively configured so that the bracing 38 is either disposed on the outside or the inside of the casing 12. Further, different forms of hinging or coupling may be provided other than the pivot pin 40 to pivotally couple the door 36 to the cover plate 16.

[0022] All such modifications and variations are deemed to be within the scope of the present invention the nature of which is to be determined from the above description and the appended claims.

Dated this 17th day of March 2003.

STEPHEN JAMES GOWLAND

By His Patent Attorneys

GRIFFITH HACK

Fellows Institute of Patent and Trade Mark
Attorneys of Australia

The Claims Defining the Invention are as Follows:

1. A pit cover including:

a casing having a peripheral wall and open opposite first and second ends;

a cross bar coupled to and extending across said peripheral wall on an inside of said casing; and,


a cover plate configured to cover said first end of said casing, said cover plate having: a first surface, which when said cover plate covers said first end is located on an outside of said casing portion, and a second opposite surface; an enclosure supported on said second surface and having an opening through which a part of said cross bar can extend into said enclosure; and, a door coupled to said cover plate said door moveable between a first position where said door closes said enclosure and a second position in which said door opens said enclosure to allow access to said enclosure from said first surface.
2. A pit cover according to claim 1 including biasing means associated with said door for biasing said door towards said first position.
3. A pit cover according to claims 1 or 2 wherein said door is pivotally coupled to said cover plate.
4. A pit cover according to any one of claims 1-3 wherein said casing is provided with first and second catches for releasably catching said cross bar to couple said cross bar to said casing.
5. A pit cover according to claim 4 wherein each of said catches includes a slot open at one end and closed at an opposite end in which said cross bar is received.
6. A pit cover according to claims 4 or 5 wherein said catches are formed

separately from and fixed to said casing.

7. A pit cover according to any one of claims 4-6 wherein said cross bar includes a first length extending in a first direction and one or more catch portions at each end of said first length, at least one catch portion at each end extending in a direction non-parallel to said first direction, said catch portions being receivable in said catches.
8. A pit cover according to any one of claims 1-7 wherein said part of said cross bar is a tab which is located in a position to extend through said opening into said enclosure.
9. A pit cover according to claim 8 wherein said tab includes a hole by which a locking device can lock onto said tab to prevent said cover plate from being removed from said casing.
10. A pit cover substantially as herein described with reference to and as illustrated in the accompanying drawings.

Abstract

A pit cover 10 includes a casing 12, a cross bar 14 and cover plate 16. The casing 12 has a peripheral wall 18 in the general shape of a rectangle, with open opposite ends 20 and 22. The cross bar 14 is coupled to and extends across the wall 18 on an inside 24 of the casing 12. The cover plate 16 is configured to cover the first end 20 of the casing 12. The cover plate 16 has a first surface 26 which, when the cover plate 16 covers the first end 20 of the casing 12 is located on an outside of the casing 12. An enclosure 28 is supported on a second opposite side 30 of the cover plate 16 and is provided with a slot 32 through which a part 34 of the cross bar 14 can extend into the enclosure 28. A door 36 is coupled to the cover plate 16 to provide access to the enclosure 28.

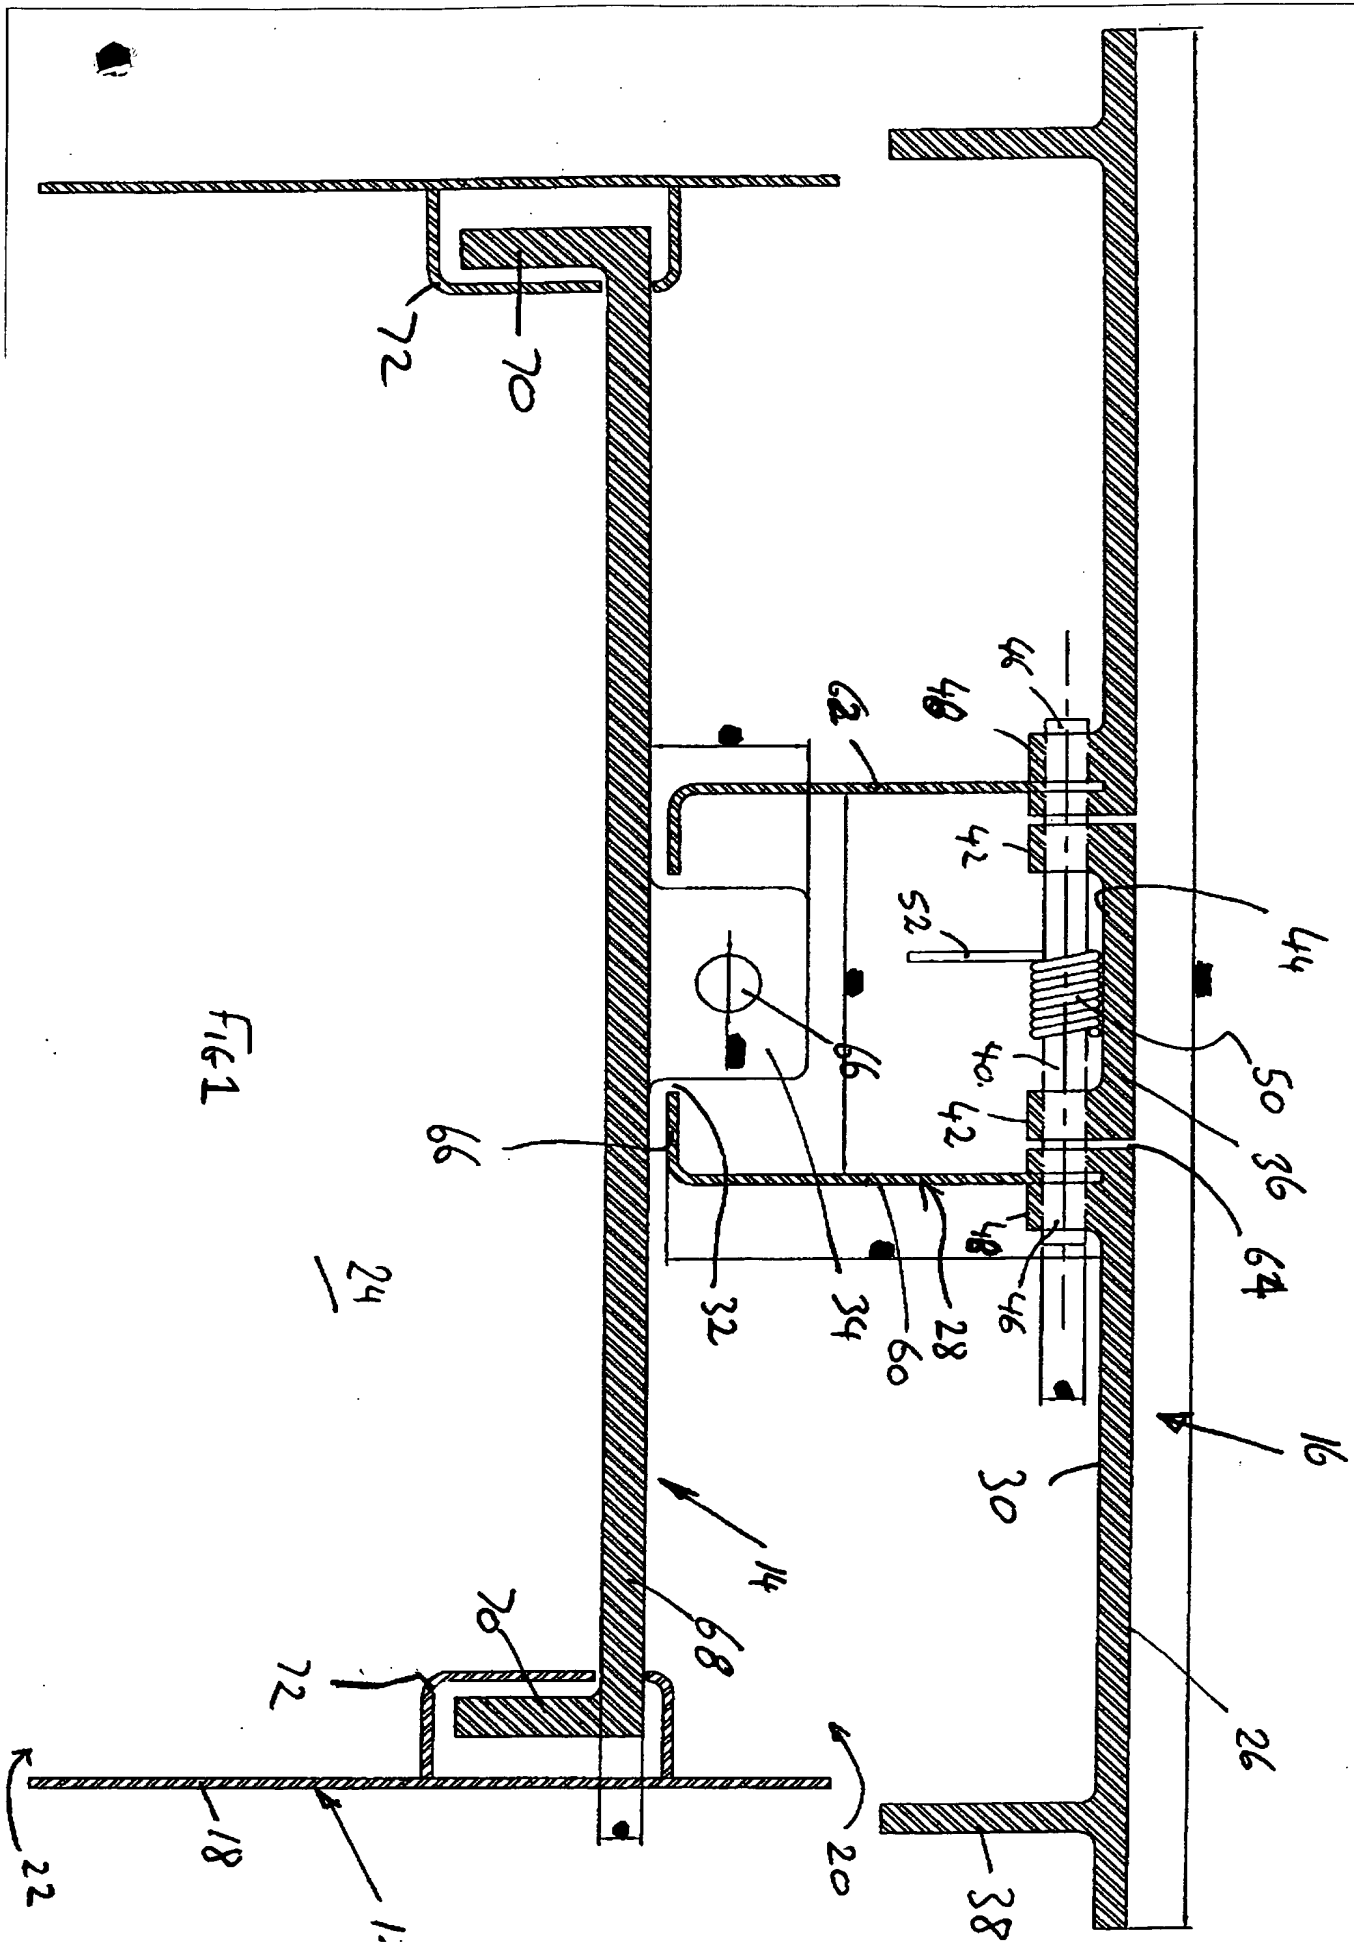

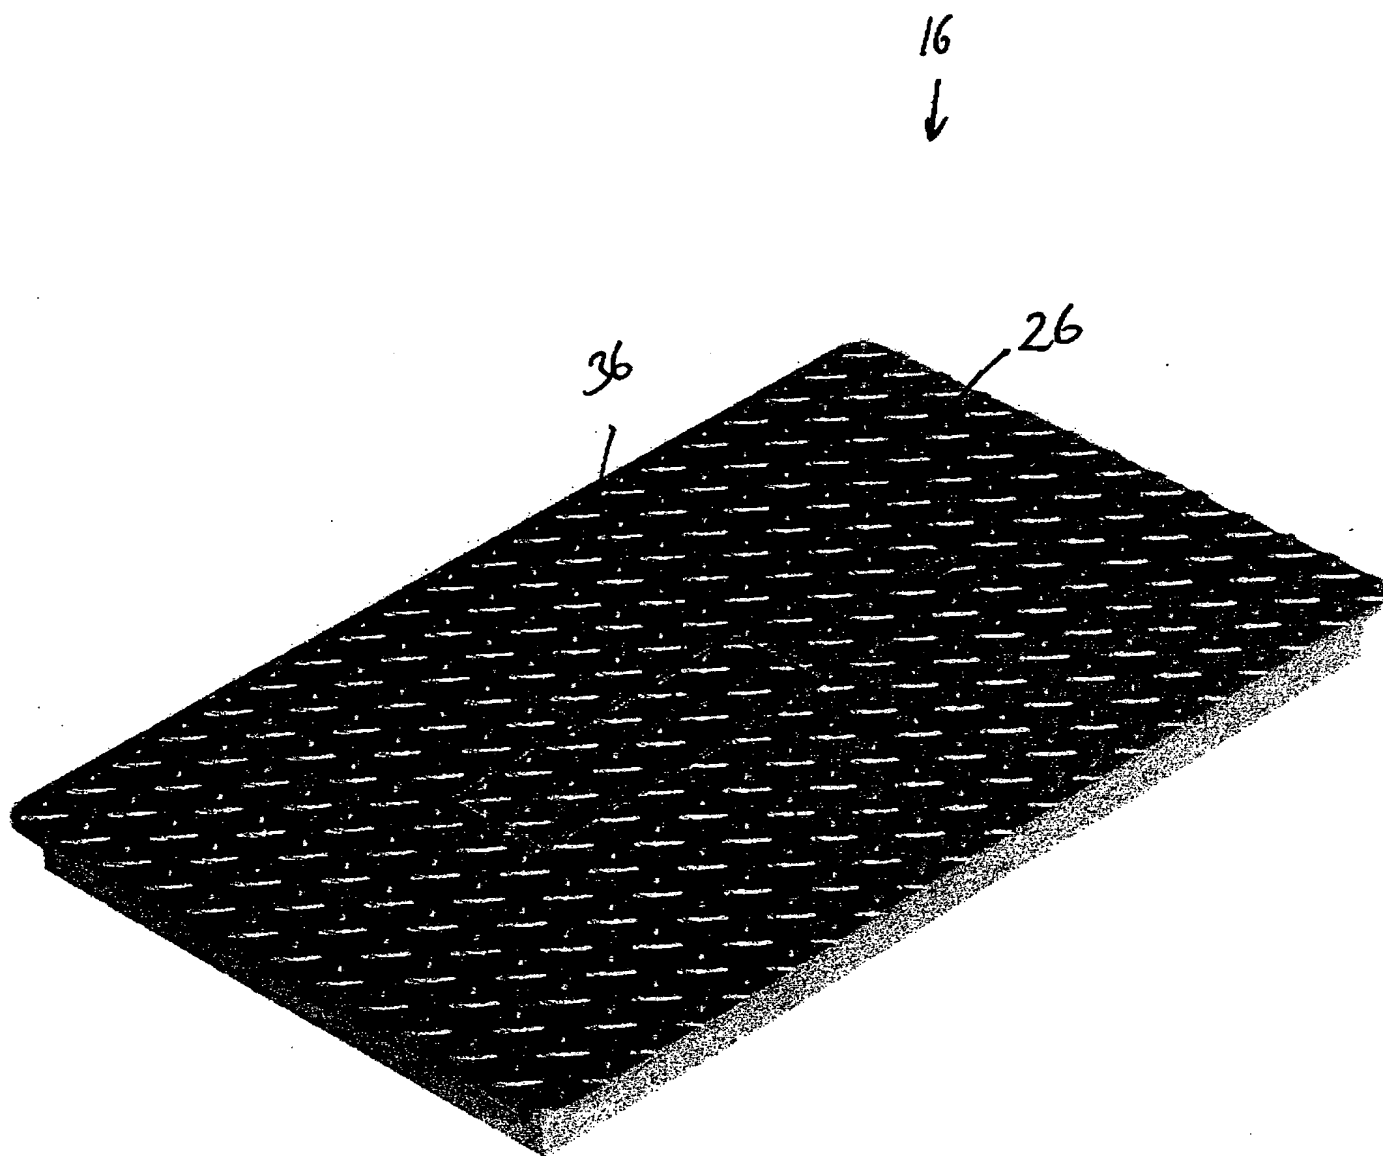


FIG 2

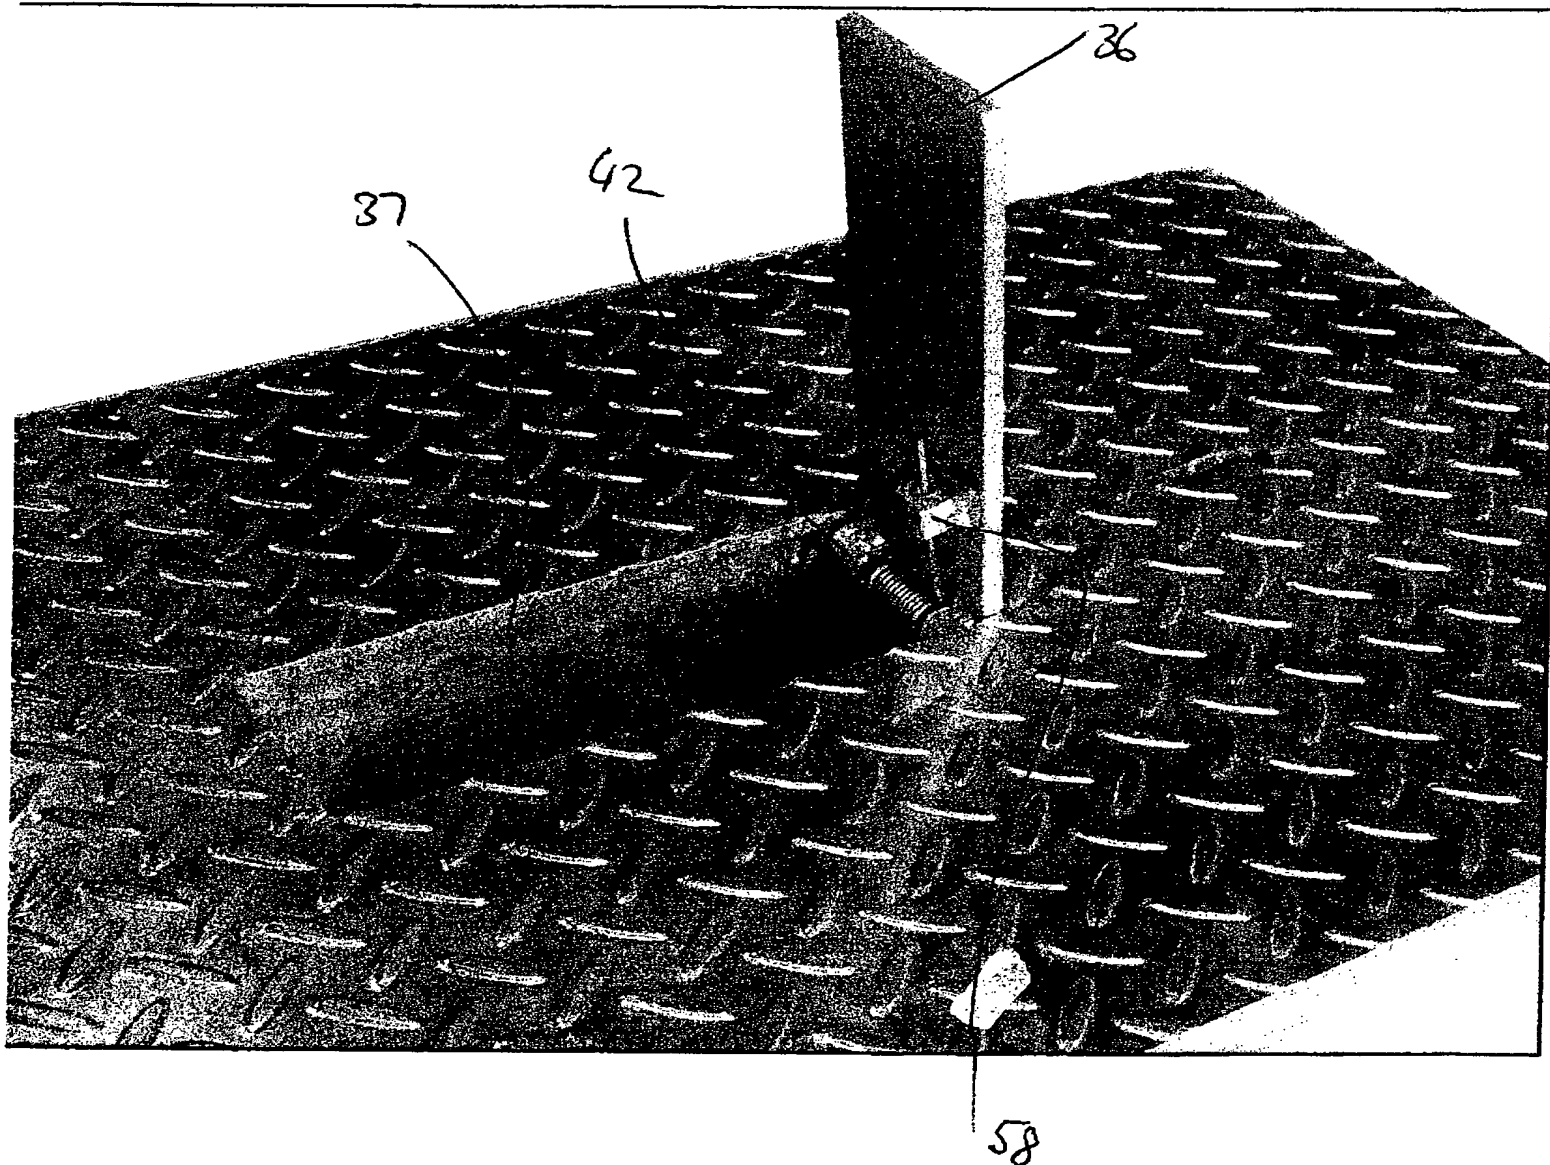


FIG 3

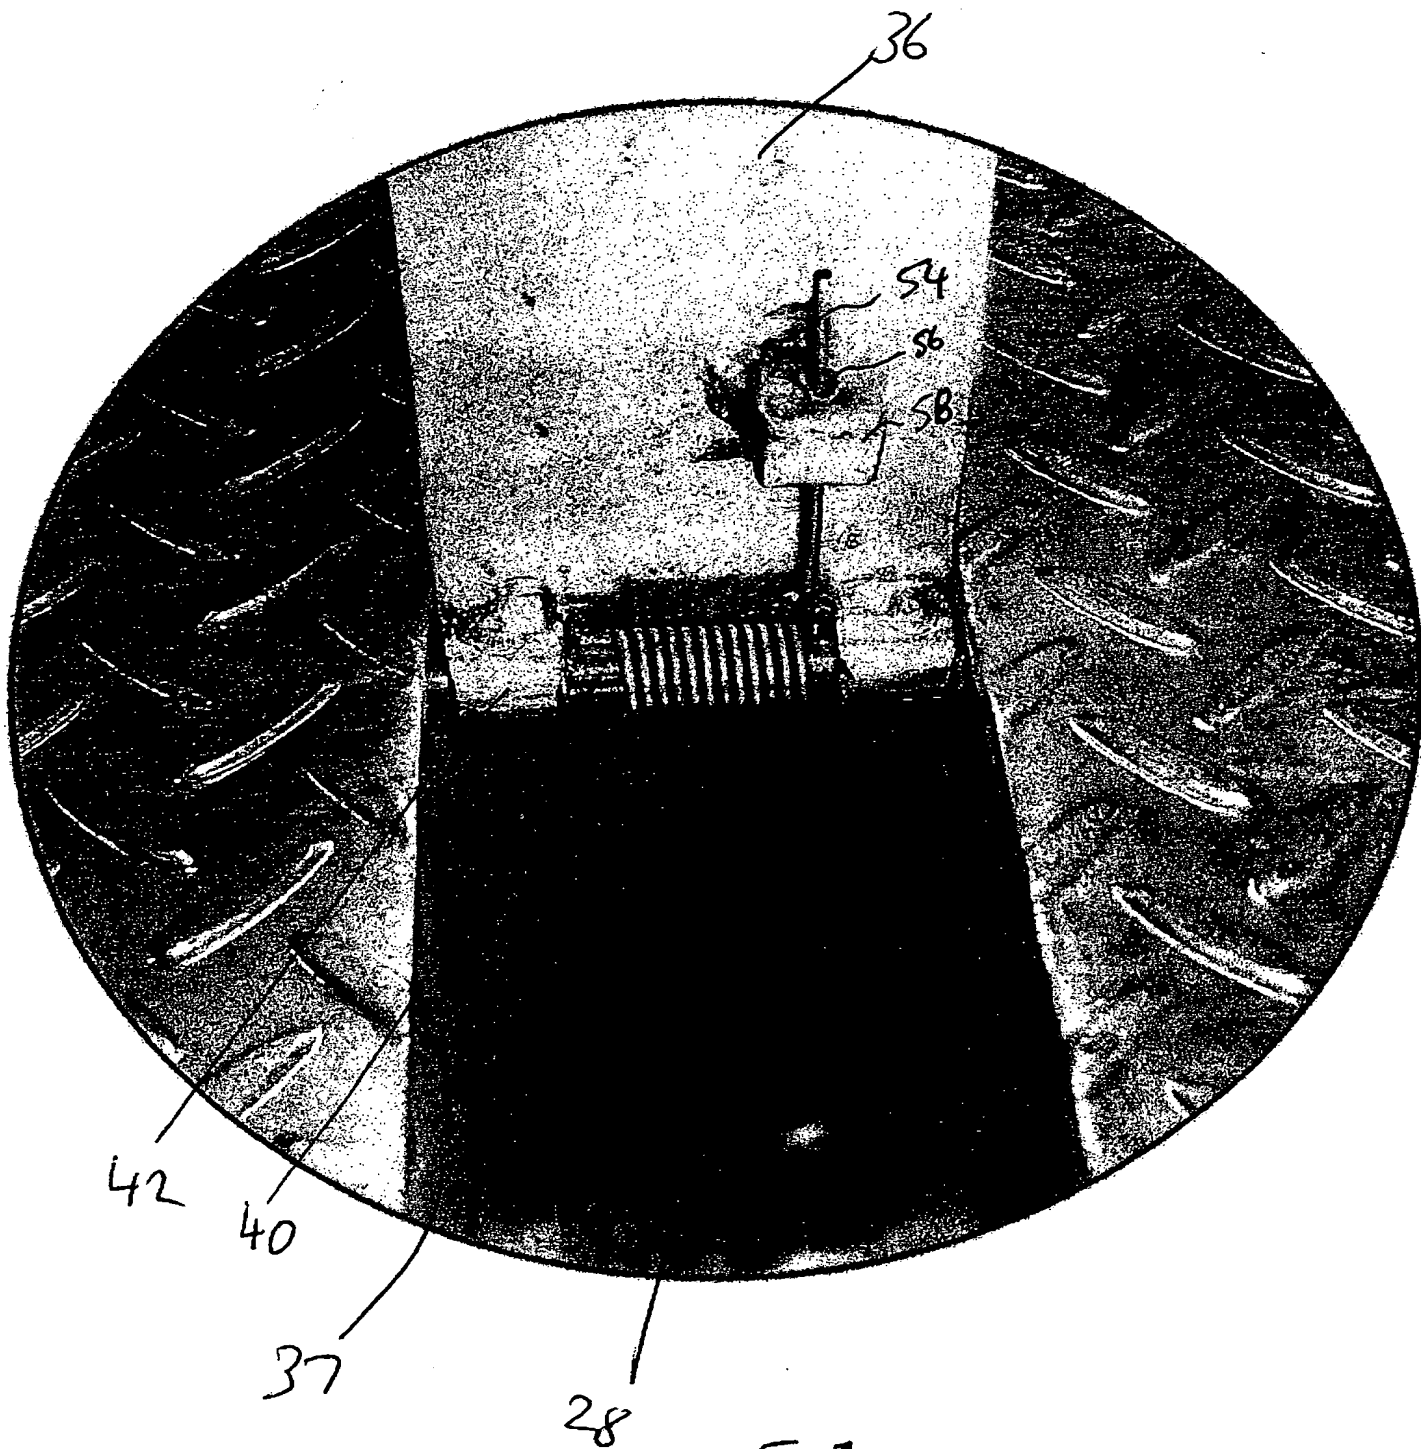


FIG 4

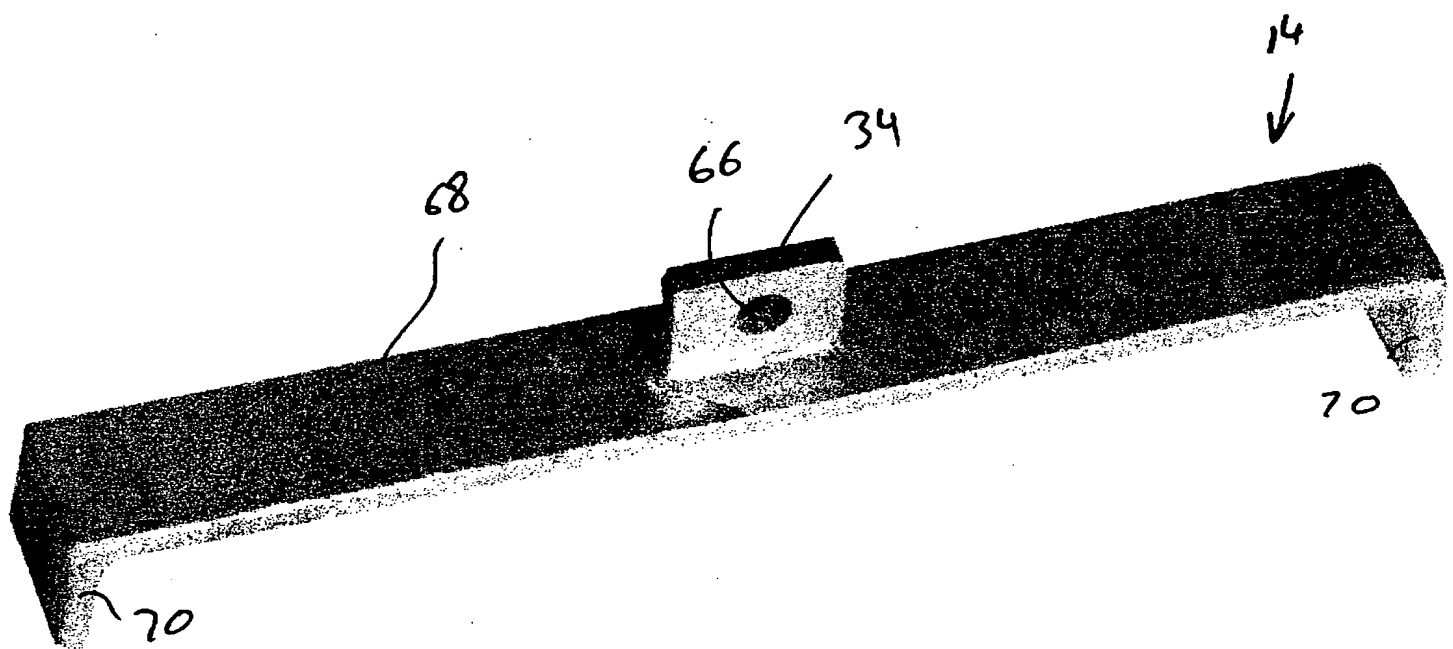


FIG 5

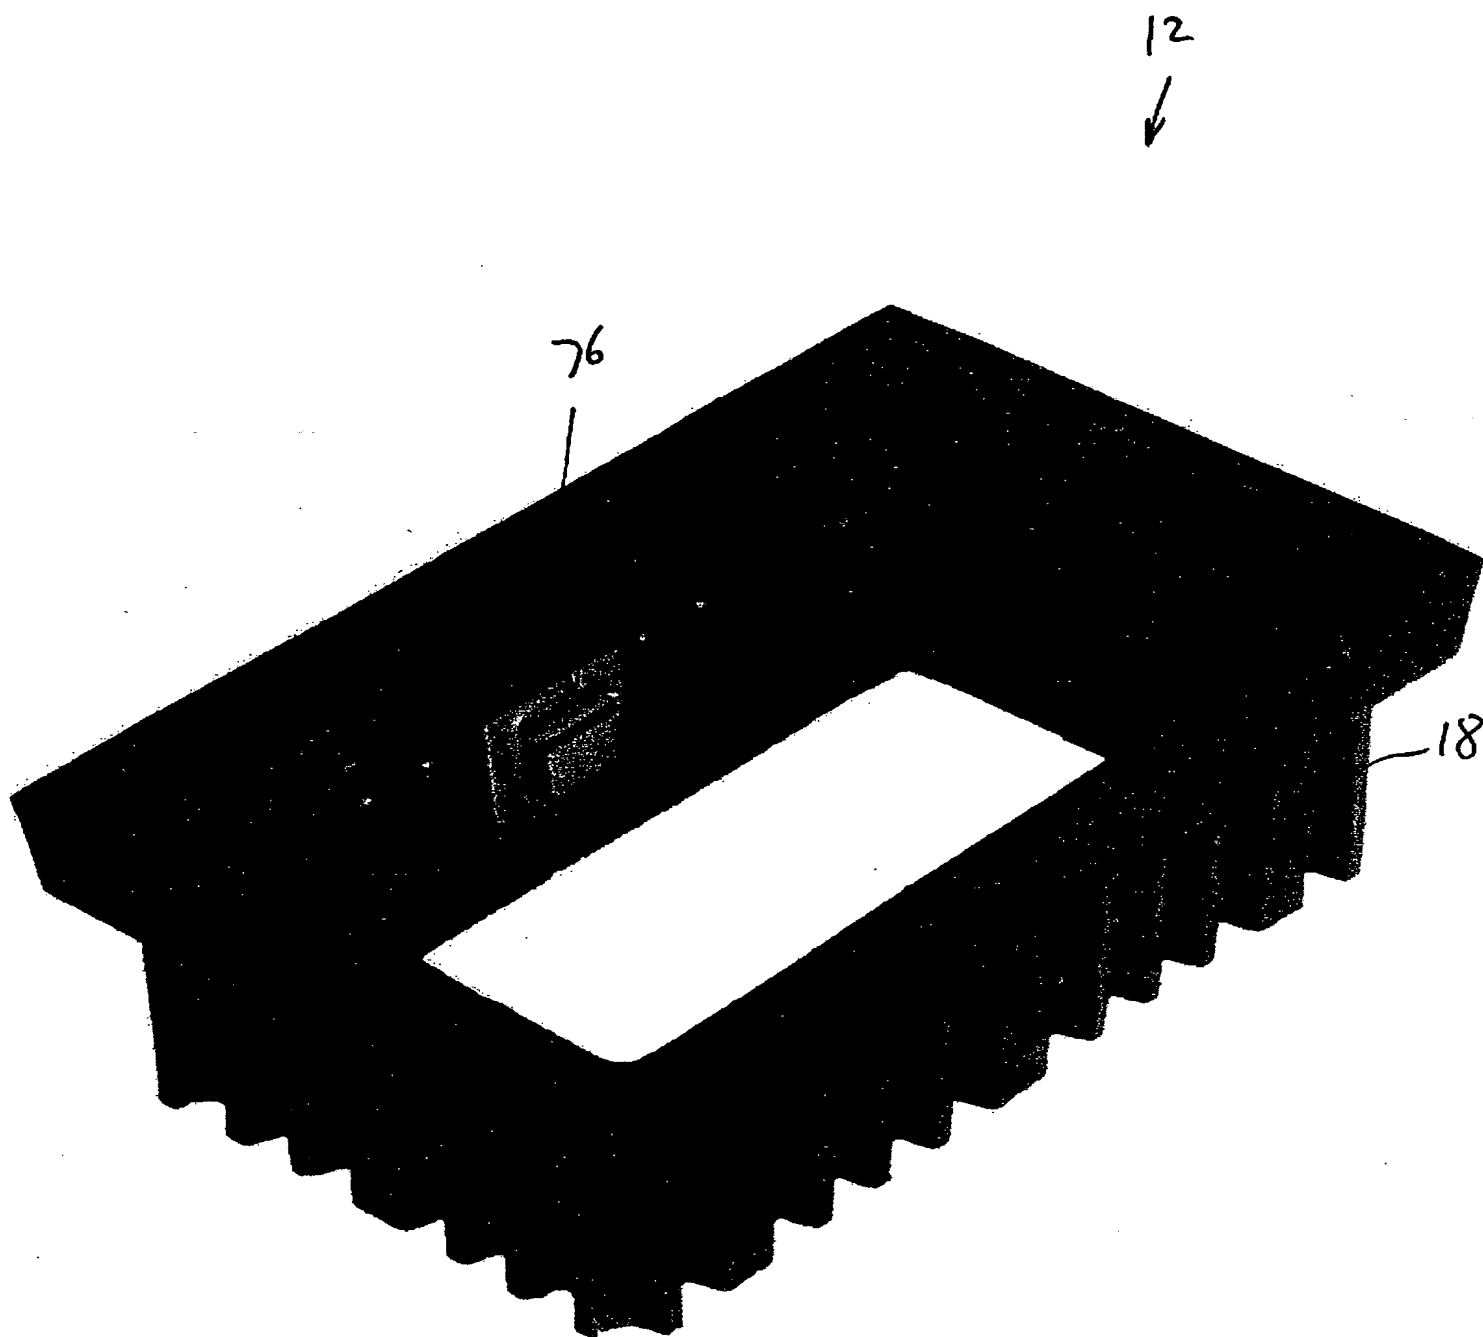


FIG 6

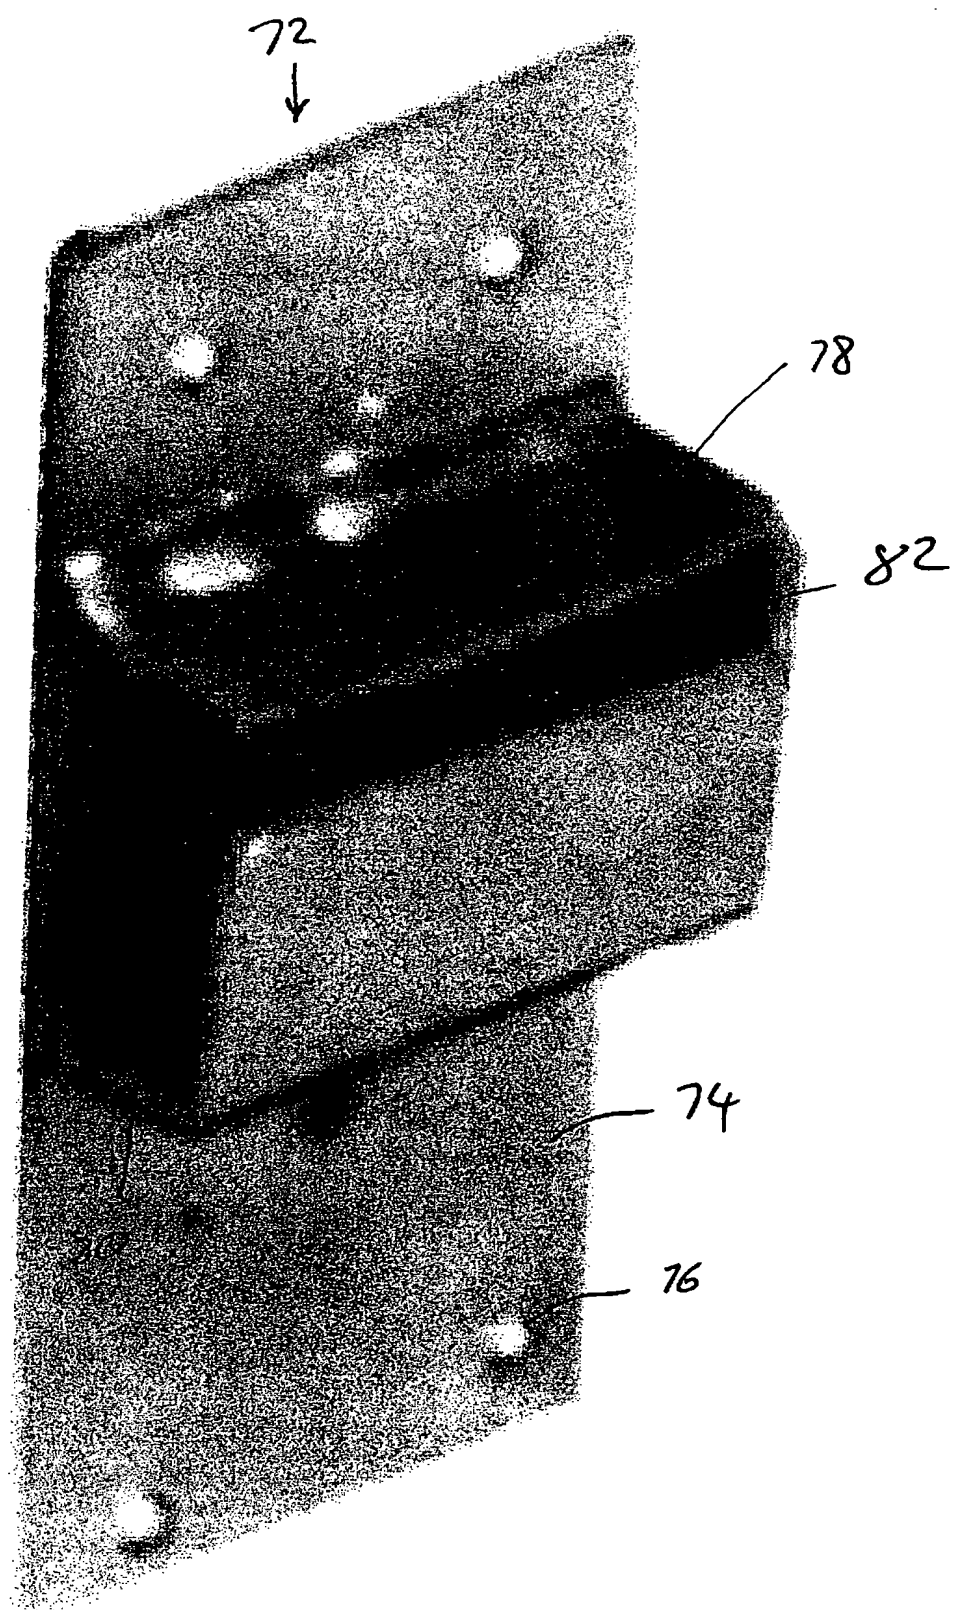


FIG 7

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.